






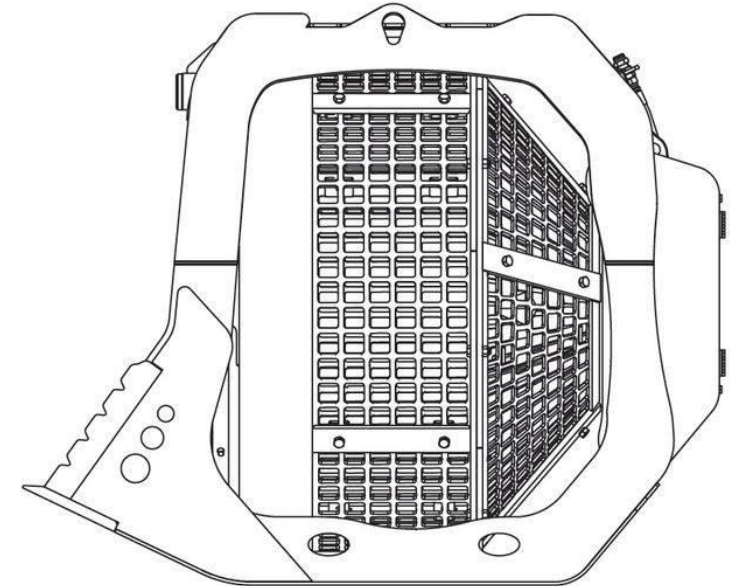

NGCREENING BUCKETS

# NG SERIES

9 MODELS SCREENING BUCKETS FROM 110 UP TO 4.900 KGS  
FOR CARRIERS FROM 1.5 ~ 55 TONS

NG Screening Buckets have the ability to be installed on all excavators. A hydraulic intermittent system allows it to be used with wet and dry materials. It has the advantage of onsite screening of various materials & are used for both before and after the crushing stage giving the owner the ability to manage materials best suited for the job. Can reduce crushing times up to 60 %.



		NG200	NG-300	NG-400	NG-700	NG-1400	NG-1600	NG-1900	NG-2600	NG-4900
 <sup>(1)</sup> Excavatorclass	T.	1.5 - 2.5	3 - 5	5 - 8	8 - 12	13 - 16	17 - 21	22 - 30	31 - 40	41 - 55
 Weight	Kg.	110	250	350	690	1320	1570	1810	2550	4900
 Capacity	M <sup>3</sup>	0.2	0.2	0.3	0.4	0.75	0.9	1.1	1.5	2.7
 Workingpressure excavator	Bar	100 - 120	100 - 120	100 - 120	100 - 120	200 - 220	200 - 220	200 - 220	200 - 220	200 - 220
 Oilflow	L/min.	20 / 30	30 / 50	30 / 50	50 / 70	40 / 80	40 / 80	40 / 80	40 / 80	40 / 80
 Rotation	U/min.	24 / 32	18 / 24	18 / 24	18 / 24	18 / 35	18 / 35	18 / 35	18 / 35	18 / 35

Screeningkits from 20-100 mm